



DDK-1500

DUAL-CODEC TRUE DAY/NIGHT IP CAMERA



The DDK-1500 is an advanced Day/Night IP camera for professional IP surveillance applications. This camera displays 520 TV lines and delivers MPEG-4/MJPEG video compression for crisp high resolution images. Its user-friendly features include SD Card slot for on-board recording, analog video output, PoE compatibility, and auto iris input.

F E A T U R E S

- 1/3" Sony Super HAD CCD
- True Day/Night Performance Using Mechanical IR Cut Filter
- Dual Codec MPEG-4 and Motion JPEG Compression
- Power over Ethernet (PoE) Compatibility
- Analog Video Output, Auto-Iris Capable
- 520 TVL High Resolution
- Minimum Illumination 0.03 lux @ F1.2
- Built-in Microphone
- Advanced Motion Detection Features
- USB Interface for Basic Network Setup
- Free 16-Channel NVR Recording Software

Rear Panel



SD Card Slot For On-Board Recording



Available with pre-installed heater, camera, lens and cables



IP CAMERAS




CBC (AMERICA) Corp.

NEW YORK: 55 MALL DRIVE · COMMACK, NY 11725
 TEL: 1 (800) 422-6707 · (631) 864-9700 · FAX: (631) 543-5426
 CALIFORNIA: 20521 EARL STREET · TORRANCE, CA 90503
 TEL: 1 (800) 888-0131 · (310) 793-1500 · FAX: (310) 793-1506
 www.computarganz.com

DDK-1500

SUPER HI-RES TRUE DAY/NIGHT IP CAMERA

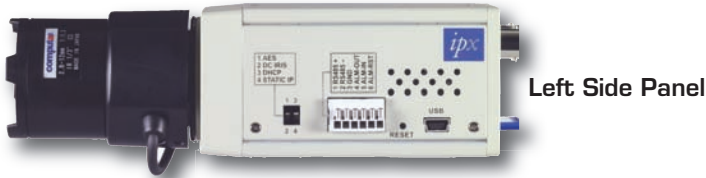

Shown installed in iPak optional outdoor housing



SPECIFICATIONS

IMAGE SENSOR	Sony Super HAD 1/3" CCD HQ1 Digital Signal Processor
COMPRESSION	M-JPEG / MPEG-4 Selectable
VIDEO OUTPUT	1.0 VpP, 75 ohm, composite
AUDIO	16bit, 8 kHz sample rate, Sync. In MPEG-4 Mode
MICROPHONE	Built-in, Omnidirectional
EXPOSURE	AGC / AWB
ELECTRONIC SHUTTER	1/60 - 1/100,000 sec
SENSITIVITY	0.5 lux @ F1.2 (Color) 0.03 lux @ F1.2 (B/W)
AUTO-IRIS	DC-Iris Support
RS-485	Enabled
SD SOCKET	Enabled
ALARM I/O	Enabled
USB INTERFACE	Enabled
CAMERA RESOLUTION	520 TVL
MPEG-4 RESOLUTION	Full D1, Half D1, CIF
MPEG-4 FRAME RATE	30, 24, 15 fps
MPEG-4 BITRATE	Multi-Level, 64Kbps - 8Mbps
MOTION DETECTION	Advanced Multi-Zone (96 Zones)
VIDEO ADJUSTMENTS	Max AGC, Contrast, Brightness, BLC, Saturation, Sharpness
POWER REQUIREMENT	12V DC / 6W
WEIGHT	0.7 lbs. / 318g
DIMENSIONS	2.4" (W) x 1.8" (H) x 3.7" (D) / 60 (W) x 45 (H) x 94 (D) mm
OPERATING TEMP.	32° F ~ 122° F / 0° C ~ 50° C
DIGITAL SIGNATURE	M-JPEG Watermark
APPROVALS	FCC, CE
PASSWORD AUTH.	Multi-level / Multi-user
VIDEO RECORDING	Via SD Card or NVR Software
NETWORK INTERFACE	Ethernet 10/100 Base-TX
NETWORK PROTOCOL	TCP/IP, DHCP, HTTP, ARP, ICMP, DDNS, DNS, UPnP, PPPoE, Supports MDIX connect
FIRMWARE UPGRADE	Via SD Card, USB or Network Interface
ACCESORIES PROVIDED	AC Power Adapter, User Manual, IP Surveillance Software, USB Wire
EXTERNAL DIP-SWITCHES	AES, DC Iris, DHCP/Static IP



CBC (AMERICA) Corp.

NEW YORK: 55 MALL DRIVE COMMACK, NY 11725 TEL: 1 (800) 422-6707 • (631) 864-9700 • FAX: (631) 543-5426
CALIFORNIA: 20521 EARL STREET TORRANCE, CA 90503 TEL: 1 (800) 888-0131 • (310) 793-1500 • FAX: (310) 793-1506
www.computarganz.com GANZ® is a registered trademark of CBC (AMERICA) Corp. © 2008 CBC (AMERICA) Corp. All Rights Reserved. 5/08