



# iPak SERIES

PREASSEMBLED OUTDOOR IP KIT WITH POWER & ETHERNET CABLES

- Pre-assembled kit with 24VAC heater and blower
- Pre-wired power & ethernet cables included
- Feed-through mounting bracket conceals cables
- Minimal set-up reduces installation time
- 24VAC power input
- Multiple mounting options available
- Slide-off cover for full accessibility
- Rugged aluminum housing suitable for all weather conditions



## Ganz® Cameras Available in iPak



[All Cameras are PoE Compatible]


### Model Numbers

- HWB3-48AMP2** MP2A w/4-8mm MP lens
- HWB3-25MP2** MP2A w/25mm MP lens
- HWB3-50MP2** MP2A w/50mm MP lens
- HWB3-281A16** DDK-1500 w/2.8-12mm IR lens
- HWB3-84A16** DDK-1500 w/8.5-40mm IR lens

\* Call for additional camera and lens combinations

## HOUSING SPECIFICATIONS

Heater Power Supply	24VAC 350mA
Maximum Camera & Lens Size	9" (L) x 2.8" (W) x 2.8" (H)
Window	0.12"/3mm thick UV stabilized polycarbonate
Camera Mounting	Removable bracket with two screws
Finish	Off white
Dimensions	17" (L) x 4.75" (W) x 4.75" (H)
Weight of Housing	3lbs/1.4kg
Operating Temperature	-20°F to 122°F
Enclosure Protection	Designed to NEMA-3R, IP 55

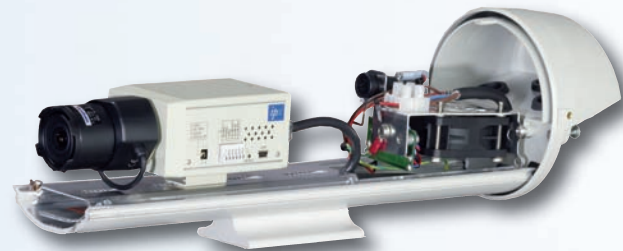

### Inside View

(Shown with DDK-1500 installed)