

# EIP220

## IP99 Series Indoor Box Type Network Camera




<b>AWB</b> Yes	<b>BLC</b> Yes	<b>AGC</b> Yes	<b>True Triplex</b>
Smart Event Wizard	FTP/SMTTP Client Support	Web Viewer	Motion Detection Support



### Features

- User friendly browser-based management software for simultaneous viewing, recording, playback and management of multiple EIP220 cameras
- Supports MPEG4 images at up to 30 frames per second at up to full D1 (720x480)
- 1/3" Sony Super HAD color CCD with the high sensitivity of 0.3 Lux/F=1.2
- 380 TVL of horizontal resolution
- Day/Night feature
- 10Base-T/100Base-TX network interface for remote monitoring via PC
- Support digital Motion Detection
- Digital inputs can be used to trigger the transmission of images from the video server upon alarm (email notification or FTP video upload)
- Support DC drive auto IRIS lens
- AGC/BLC/Contrast/Color adjustable control via web browser
- Easy-to-use on-screen PTZ control
- Built-in digital zoom function

### Dimensions

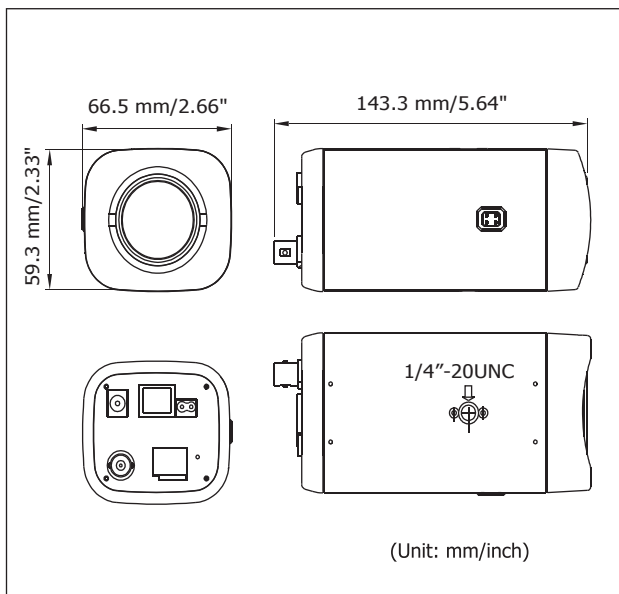

### Specifications

<b>CAMERA</b>	
Pickup Device	1/3" Sony Super HAD Interlaced CCD
Video Format	NTSC/PAL
Pixel Effective	NTSC: 510 (H)x492 (V) / PAL: 500 (H)x582 (V)
Sensitivity	0.3 Lux / F=1.2
Day/Night	Yes
Lens	C/CS Mount
Video Output	BNC socket, composite 1 V p-p / 75 ohm
Video Output Resolution	380 TVL
<b>AUDIO</b>	
Audio Input	One way audio
Audio Format	A-Low/u-Low
<b>NETWORK VIDEO</b>	
Electronic Shutter	Auto/Manual
Backlight Comp.	On/Off
Mirror	On/Off
Auto Iris	Direct Drive Switch
AGC/Brightness/Contrast/Color	Adjustable
Video Compression	D1: 720x480 Half D1: 720x240 CIF: 352x240 QCIF: 176x144
Video Resolution	MPEG 4 Compression
Frame Rate	Up to 30fps
<b>NETWORK</b>	
Interface	10Base-T/100Base-TX auto-negotiation, RJ-45 socket
Supported Portocols	HTTP, TCP / IP, UDP, FTP, NTP,SMTP, DHCP, DNS, DDNS, PPPOE
Network Security	3 Level Security Protection
Max. Client Limit	Up to 20 clients simultaneously
PTZ Control	RS-485 (Pelco-P/Pelco-D)
<b>ALARM</b>	
Alarm	2 Ch. alarm input / 2 Ch. alarm output
<b>MOTION</b>	
Operation	Built-in Motion Detection
<b>EVENT MANAGEMENT</b>	
Event Trigger	Event trigger via alarm input, manual trigger, motion detection
Notification	Trigger alarm output, send mail notification, upload video to FTP, record video to PC
<b>POWER</b>	
Power Source	12 VDC
Power Consumption	9W max.
<b>PHYSICAL</b>	
Weight	340g / 0.75 lbs
Dimensions (L x W x H)	143.3 x 66.5 x 59.3 mm / 5.64" x 2.6" x 2.33"

### Ordering Information

- **EIP220/N:** IP99 Series Network Camera, NTSC, DC12V

\*All product specifications are subject to change without notice