

# KPT-SPD201FHEV

## Introduction

The Vandal Resistant KPT-SPD201FHEV is an Outdoor SPEED DOME PTZ CAMERA.


This unit can monitor the target area efficiently with the PTZ control in all weather conditions.

## Special Features

- ⊙ Programmable AE(D/N, White Balance, Shutter Speed etc) per Preset
- ⊙ Optical 22x / Digital 10x Zoom / 480 TVL / 0.001 Lux (DSS)
- ⊙ Vandal Proof / Weather Resistant (IP66) / Built-in Fan & Heater
- ⊙ Standard Wall Mount / Optional Pendant/Pole/Corner Mount



### Optional Mounts

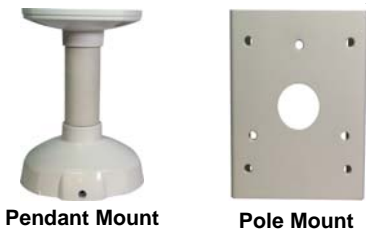

Model	KPT-SPD201FHEV	
Signal Format	NTSC	
Camera	Device	1/4" Sony Super HAD CCD
	Total Pixels	410K Pixels [811(H) x 508(V)]
	Resolution	480 TV Lines
	MIN. Illuminance	1 Lux (Day) 0.001 Lux (Night with DSS)
	Focus	Auto / Manual
	Iris	Auto
	BLC	On / Off
	Flickerless	FL On / Off
	Zoom	22 X Optical Zoom and 10 X Digital Zoom
	White Balance	Auto / Manual / Indoor / Outdoor
	Focal Length	f=3.9 ~ 85.8mm
	Day & Night	Day / Night / Auto ( DSS )
	Pan/Tilt	Range
Pan/Tilt Speed		Manual : 0.05° ~ 150/sec (Zoom Proportional)
		Preset : 360° /sec Swing : ~ 60° /sec (Zoom Proportional)
Preset		128 Presets / Programmable AE per Preset
Privacy Zone		8 Zones
Pattern		4 Patterns (MAX. 1 Minute Each)
Swing		8 Swings
Group	8 Groups ( MAX. 20 Entries)	
General	Sensor In/Out	4 Input / 2 Output
	Other	Auto Flip / Auto Parking
	Communication	RS-485
	Power	AC 24V / 1.5 A (Without Fan & Heater) AC 24V / 2A (With Fan & Heater)
	Dimension	252(φ) x 319(H)mm
Operating Temp.	-30° C ~ 50° C / -22° F ~ 122° F	



**KT&C USA, Inc.**  
 3240 Wilshire Blvd. Suite 501  
 Los Angeles, CA 90010  
 Tel 213-381-0061 Fax 213-381-0061  
 sales@ktncusa.com / www.ktncusa.com