


26" PUBLIC VIEW MONITORS

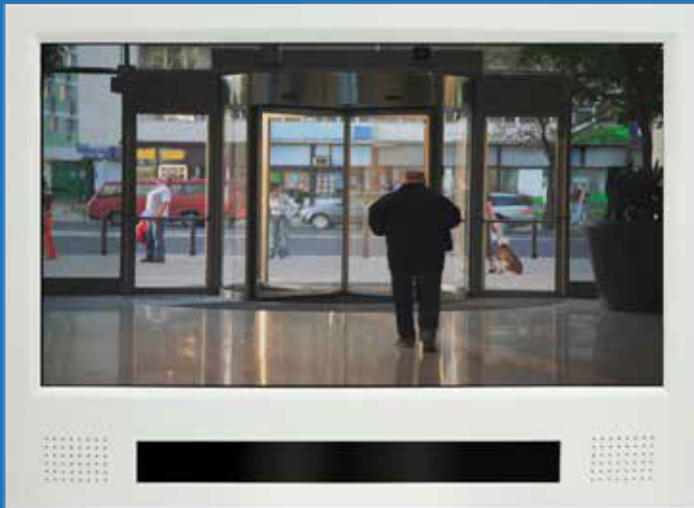

Model Number

Screen Size

Viewable Size

View Angle H/V

Contrast Ratio

Brightness

Resolution

Response Time

Power Supply

Input-Voltage

Consumption

Video I/O

Input

Output

Internal WDR Camera

Image Sensor

Sensitivity

S/N Ratio

Resolution

Lens

Dynamic Range

Electronic Shutter

Dimension

Weight

Regulatory Approvals

Additional Benefits

TLM-2601PVM-B (Black), TLM-2601PVM-W (White)

26" WXGA

575.769mm (H) x 323.712mm (V)

-89°, +89°/-89°, +89°

3000:1

450 cd/m²

1366 x 768

6.5ms

24VDC

63W (Typ.)

Composite video, connector: 1 BNC

S-video, connector: 1 mini-din 4 pin

Level: 1.0Vp-p / 75Ω

2 BNC connector for (1) internal camera loop-through output, (2) Ext. CVBS loop-through output

1/3 Sony 2.4 Megapixel Exmor CMOS Sensor

0.05 Lux @F1.2 Color, 0.02 Lux @F1.2 B/W, 0.001Lux @F1.2 SenseUp

N/A

720p

2.8-12mm / F1.4mm Auto Iris Lens

90dB

1/30 to 1/300,000 sec

25.5" x 19" x 3.5"

26.4 lbs

FCC, UL

Light sensor for auto power off setting under low ambient luminance.

Selectable 3 pre-edited & 1 user editable display text messages, 28 characters max.

Programmable switching interval between internal and external camera images.

Video De-interlace, 3D Comb Filter, DNR (Digital Noise Reduction)

Wall / Pole / Ceiling Mountable(100x100, 200x100, 400x200mm²)